


RENDERING & PROTEIN RECOVERY

# PRECOOKER




**RENDERTECH**

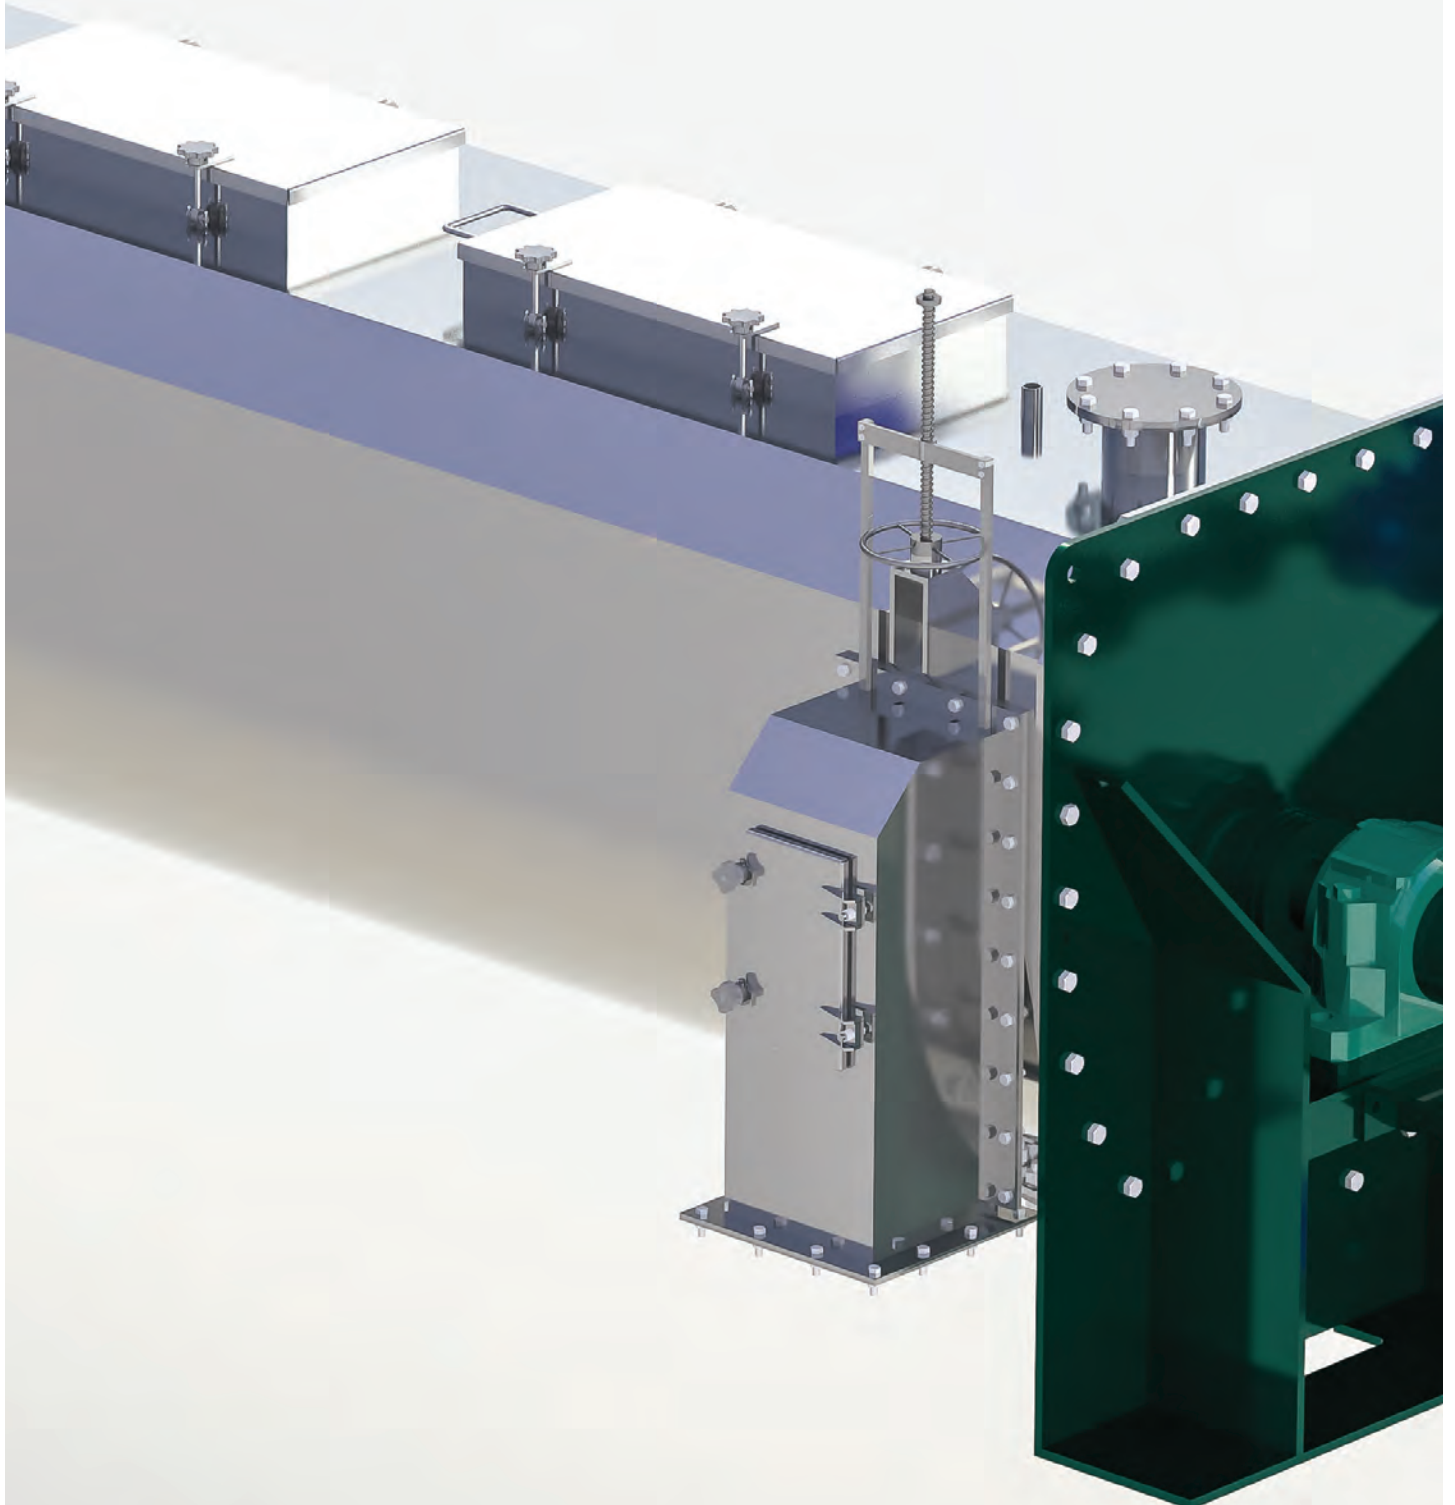



# PRECOOKER

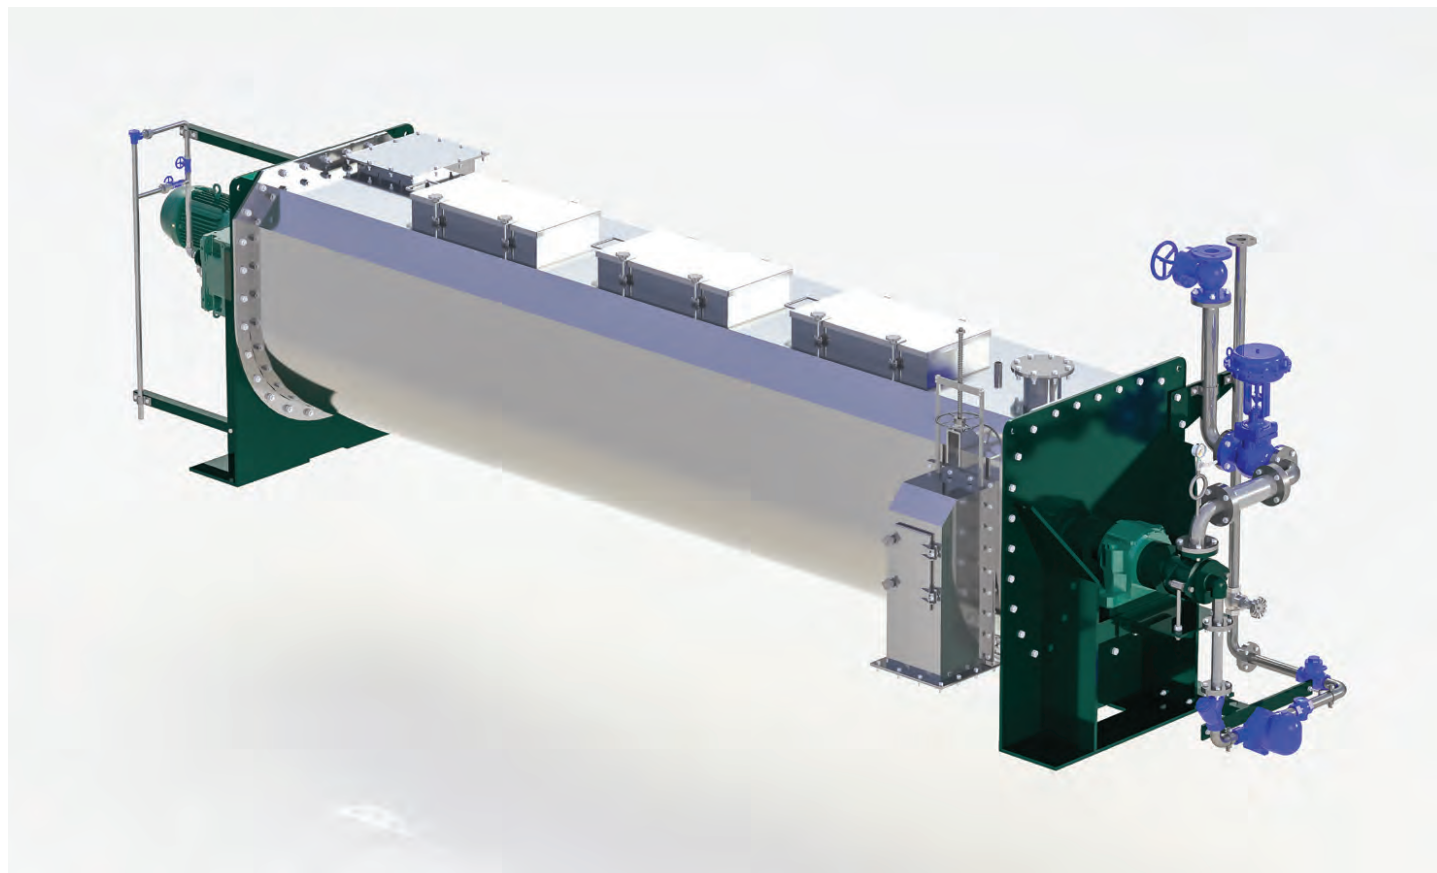**RENDESTECH**

The Rendertech Precooker is a steam-heated, indirect disc cooker used for heating meat and poultry co-products prior to mechanical dewatering and further processing. The Precooker uses a horizontal shell with a steam-heated hollow disc rotor for heating and transport of the product along the length of the Precooker. The Precooker rapidly heats the material to coagulate the proteins and break down the fat cells without harsh agitation. The temperature is automatically controlled by a steam modulating valve.

**AUTOMATED CONTROL**

This flexible and fully automatic machine is very simple to operate. It is well-designed and requires minimal operator input, even when handling difficult and sticky products.

**LOW MAINTENANCE**



The Precooker uses robust construction and standard components. Hinged covers along the full length of the shell allow easy inspection and cleaning. A dump valve at the base allows for complete emptying and cleanout.

**LOW ROTATION SPEED**

The low rotation speed means reduced wear on the machine and produces less product 'fines'.

**ODOUR CONTROL**

The Precooker is fully sealed to capture odours and vapours, and has a flanged nozzle for connection to your odour control system.

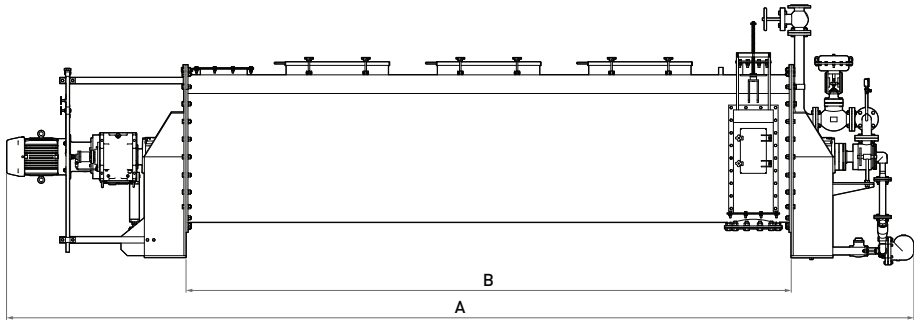

|                                               | PC 5  | PC 8.5 | PC 10 | PC 15 | PC 20  |
|-----------------------------------------------|-------|--------|-------|-------|--------|
| TECHNICAL SPECIFICATION                       |       |        |       |       |        |
| Nominal capacity (tonne/hr)                   | 5     | 8.5    | 10    | 15    | 20     |
| Drive motor (kW)                              | 11    | 11     | 15    | 22    | 22     |
| PRODUCT DIMENSIONS                            |       |        |       |       |        |
| Dimension A (mm)                              | 5,820 | 7,200  | 6,760 | 6,680 | 8,680  |
| Dimension B (mm)                              | 3,885 | 4,800  | 4,400 | 4,010 | 6,010  |
| Dimension C (mm)                              | 1,500 | 1,530  | 1,770 | 2,125 | 2,125  |
| Dimension D (mm)                              | 1,530 | 1,550  | 1,800 | 2,150 | 2,150  |
| WEIGHT                                        |       |        |       |       |        |
| Shipping weight (kg)                          | 4,200 | 5,000  | 7,100 | 9,100 | 10,800 |
| TECHNICAL DATA                                |       |        |       |       |        |
| Adjustable outlet weir for level control      |       |        |       |       |        |
| Manufactured to PD5500 pressure vessel code   |       |        |       |       |        |
| Normal working steam pressure 6 bar           |       |        |       |       |        |
| Shell insulated and clad with stainless steel |       |        |       |       |        |

|                                 |
|---------------------------------|
| OPTIONS                         |
| Drainer conveyor                |
| Gearbox condition monitoring    |
| Platforms and structures        |
| Carbon steel or stainless steel |

YOUR  
PROCESS  
PARTNER

We are specialists in process and storage solutions, providing the products and technical expertise to get the best from your plant. For more information call for a no obligation chat about your processing needs.

E enquiries@rendertech.co.nz  
T +64 9 634 5375

Rendertech Ltd  
8 Rakino Way, Mount Wellington  
Auckland 1060, New Zealand  
PO Box 12629, Penrose,  
Auckland 1642, New Zealand

RENDETECH.CO.NZ