

The STORD Twin Screw Press

A superior press has become even better !



In particular made for Fish and Rendering dewatering applications.

Features:

- ***Maximum dry substance content in pressed material.***
- ***Substantial savings in drying plant fuel consumption cost.***
- ***Easy installation and low maintenance cost.***
- ***Low power consumption.***
- ***Robust and reliable design and simple operation.***
- ***Increased oil/fat recovery.***
- ***Available in a wide range of capacities.***
- ***Stainless steel and mild steel executions.***



Stord Process AS, Ljamyrane 6, 5132 Nyborg, Bergen - Norway
E-Mail: stord@stord-as.com Phone.: +47 55197230 Cell.: +47 90562606

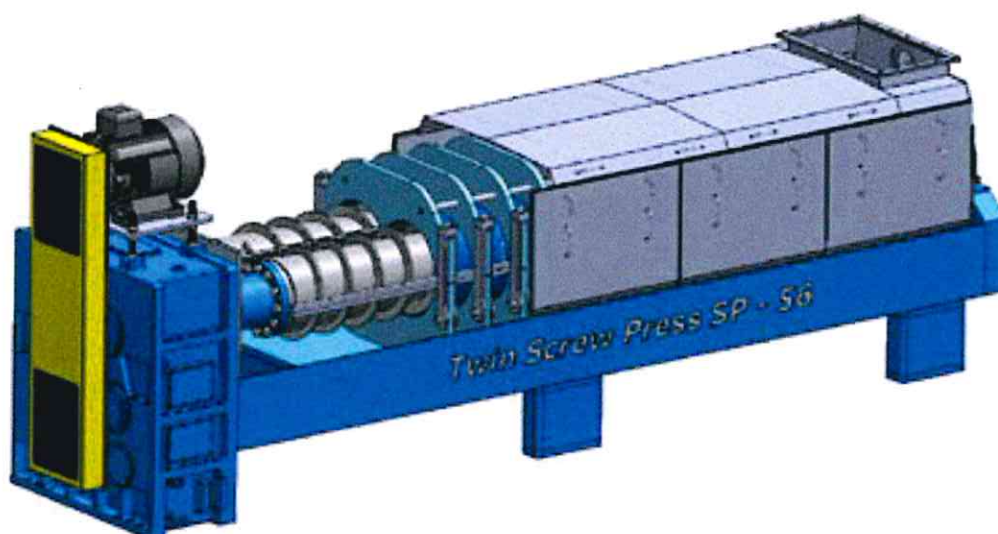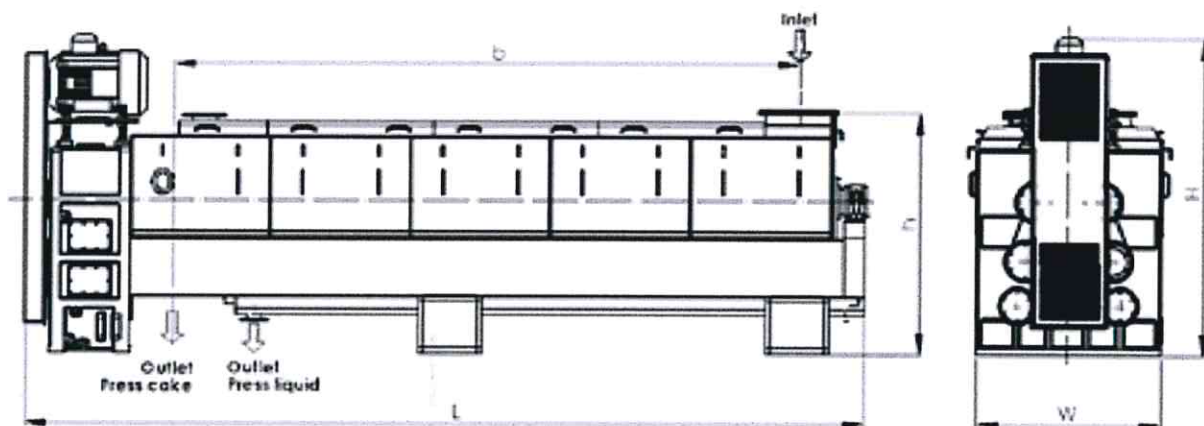

Type	Nominal Capacity raw material tons/hour	Motor kW	Approx. dimensions in mm				Metric tons
			L	H	h	W	
SP - 18	0.5	3	2500	900	900	500	0.8
SP - 24	2 - 3	11	2900	1170	1170	800/1250	3
SP - 35S	5 - 6	22	3800	1600	1350	980/1250	5
SP - 35	6 - 7	22	4000	1600	1350	1100/1350	5,5
SP - 41	10 - 12	37	4600	2100	1600	1100/1300	10
SP - 49	15 - 18	45/55	5700	2300	1800	1500/1860	14
SP - 56	20 - 25	55/75	6600	2400	1900	1440/1700	22
SP - 64	30 - 40	75-90	7500	2800	2200	1600/1950	25
SP - 64L	45 - 50	90/110	8500	2800	2200	1600/1950	29